

# THE DIRECTOR™



The Director™ barrel provides the service features required in a plastic drum. Molded from impact-resistant low density polyethylene, the Director™ minimizes vehicle damage and remains serviceable after numerous impacts. The Director™ barrel and base design minimize roll after vehicle impact.

The Director™ rubber base is designed to grip the road for maximum stability. Three weight options will suit any job site requirements.

The large access handle allows a worker's gloved hand to easily grasp the Director™ while handling and dragging.

Our new lock-tight system allows the Director™ to be moved without separation of base and barrel.

The Director™ meets or exceeds MUTCD Specification and is tested and certified to meet the requirements of NCHRP-350.

**Also works perfectly  
with tire ring ballast**



See reverse side for specifications.



# THE DIRECTOR™ SPECIFICATIONS

## Tested and Certified to Meet the Requirements of NCHRP-350

### Material

- Impact resistant, low density polyethylene

### Color

- Safety orange with ultraviolet stabilizer for fade resistance


### Physical Appearance

- Height 42.5" (1080 mm) overall
- Width 18" (457 mm) top
- Width 23.5" (597 mm) base

### Other Features

- Meets MUTCD specifications – 18" minimum diameter
- Two piece break-away construction
- Built in anti-roll design
- Able to display one or two type "A" or "C" lights
- Large built-in handle for easy maneuverability
- Stacks for efficient transporting to and from the job site
- Available with or without reflective sheeting
- Choice of recycled rubber bases
- 25 lb (11.3 kg)      40 lb (18.1 kg)
- Built with traditional Lakeside quality

**Note:** Weights and measurements have been rounded. Specifications are subject to change. Please contact Lakeside Plastics for current information.

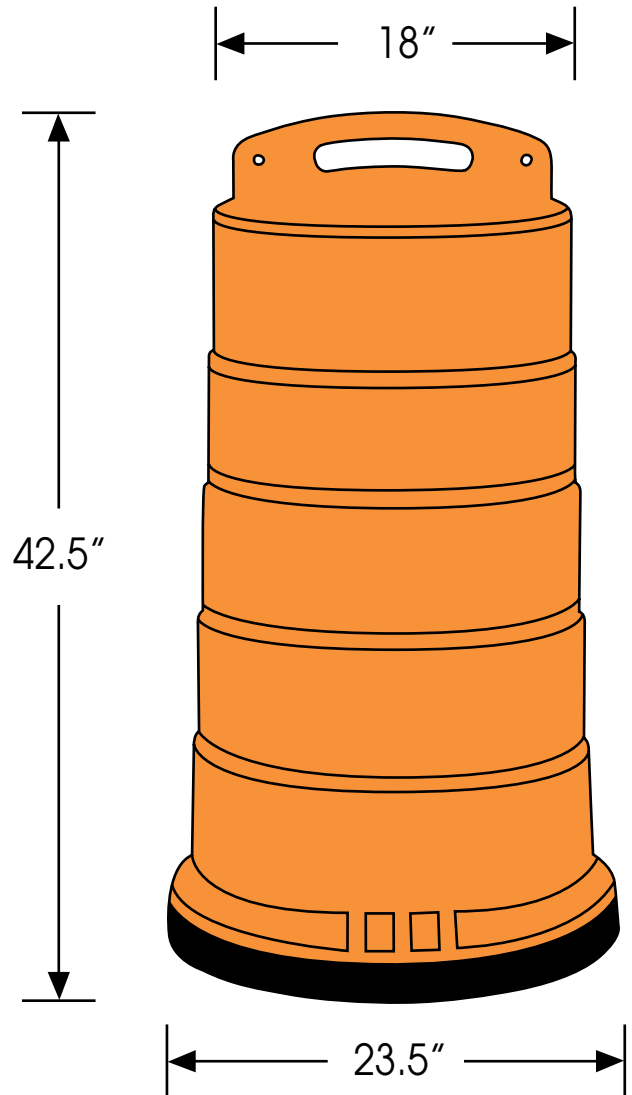

**Model: FTS-5**