
In-Street Pedestrian Crosswalk Sign 2009 MUTCD Standard


12"x 36" fluorescent yellow green diamond grade reflective sheeting with 10"x 24 white 3M™ High Intensity sheeting insert. White post and panel.

Overall height of unit is 47"






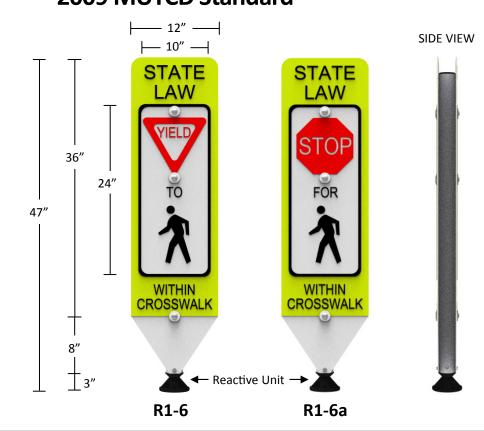





Surface Mount: Fixed Base



Recessed, Low Profile Snow-Plowable Base

BASE OPTIONS

This product can be used with the One Base® Portable Quick Release Base, Surface Mount Fixed Base, or Recessed, Low Profile Snow-Plowable Base

SPECIFICATIONS

- Post and panel are constructed of flexible polyethylene plastic that is resistant to: ultraviolet light, ozone, and hydrocarbons.
- Unit has an anti-twist reactive spring assembly that rebounds to upright when struck.
- NCHRP-350 Approved
- Weight: 12 pounds without base

RECOMMENDED USES

- Ideal for delineating crosswalks to reduce the risk of injury, death, and property damage.
- Take care to avoid creating a trip hazard when using any sign in a crosswalk. Ensure that sign bases are outside the crosswalk area.



4955 Stout Dr. • San Antonio, TX 78219 210-736-4477 • 800-736-5256 • Fax 210-734-6448 Email: info@impactrecovery.com www.impactrecovery.com

