



**SOIL ANCHOR SYSTEMS**

Safe-Hit's two-part driveable delineators feature a 2 1/4" (57.2mm) post diameter and are used for marking highways, entrances, exits, curves, driveways, fire lanes and parking lots. Decals can be used instead of reflective sheeting if desired. See page 11 for details. Each post on this page includes one 8" (203.2mm), 14" (355.6mm) or 18" (457.2mm) closed or open end soil anchor. **Specify post and reflective sheeting colors when ordering.**



- Standard Post Colors:* White, Yellow or Orange
- Custom Colors:* Light Gray, Dark Gray, Green, Blue, Black, Brown or Red
- Reflective Sheeting:* Standard is high-intensity Silver, Amber or Orange (see page 12 for other reflective options)

**TYPE 1 HAZARD MARKER**


Round post, flattened on top with black oval cap, three 3" (76.2mm) x 3" (76.2mm) reflective patches and Driveable Soil Anchor.



Size	Part No.
48" 1219mm	SH148GP3--WA

**TYPE 3 CHANNELIZER**

Round post with recessed cap, one 6" (152.4mm) reflective wrap and Driveable Soil Anchor.



Size	Part No.
54" 1371mm	SH354GP3--YA
48" 1219mm	SH348GP3--YA
42" 1066mm	SH342GP3--YA
36" 914.4mm	SH336GP3--YA
28" 711.2mm	SH328GP3--YA
24" 609.6mm	SH324GP3--YA

**TYPE 2 GUIDE POST**


Round post, flattened on top with black oval cap, one 3" (76.2mm) x 9" (228.6mm) reflective strip and Driveable Soil Anchor.



Size	Part No.
54" 1371mm	SH254GP3--WS
48" 1219mm	SH248GP3--WS
42" 1066mm	SH242GP3--WS
36" 914.4mm	SH236GP3--WS
28" 711.2mm	SH228GP3--WS
24" 609.6mm	SH224GP3--WS

**TYPE 5 MARKER POST**

Round post with recessed cap, two 3" (76.2mm) reflective wraps and Driveable Soil Anchor.




Size	Part No.
48" 1219mm	SH548GP3--YA
42" 1066mm	SH542GP3--YA
36" 914.4mm	SH536GP3--YA
28" 711.2mm	SH528GP3--YA
24" 609.6mm	SH524GP3--YA





# ANCHORS, ACCESORIES & TOOLS

Safe-Hit's driveable posts come standard with an 18" (457.2mm) closed end, driveable Soil Anchor. You may substitute other anchor sizes. In heavy soil a 14" (355.6mm) or 18" (457.2mm) anchor is recommended. In sandy or loose soil a 24" (609.6mm) anchor should be utilized. The 8" (203.2mm) anchor is used for concrete applications.

SOIL ANCHORS			
Size	Type	Part No.	
8"	203.2mm	Open End Concrete (GP1)	SHA1-080E-GL
14"	355.6mm	Closed End Anchor (GP3)	SHA3-018C-GL
14"		Open End Anchor (GP4)	SHA4-180E-GL
18"	457.2mm	Closed End Anchor (GP5)	SHA5-14C--GL
18"		Open End Anchor (GP6)	SHA6-140E-GL
24"	609.6mm	Open End Anchor (GP8)	SHA8-240E-GL
24"		Closed End Anchor (GP9)	SHA9-24C--GL



Closed End
Open End

ACCESORIES	
Accessory Part	Part No.
 <b>"O" Ring Replacement</b> Black for Type 1 and Type 2 Posts	<b>2708861-0000</b>
 <b>Oval Cap</b> Black for Type 1 and Type 2 Posts	<b>2023060-0006</b>
 <b>Oval Cap</b> White for Type 1 and Type 2 Posts	<b>2023060-0000</b>
 <b>Anchor Plug</b> For all soil anchors	<b>SHAP--04A-BL</b>

## MANUAL INSTALLATION TOOLS

### MANUAL ANCHOR INSTALLATION TOOL

The manual installation tool drives anchors into the soil. Designed to maintain the correct inside diameter and shape of the installed soil anchor.

**Part No.** SHTOL-30-6-X



### ANCHOR STRAIGHTENING TOOL

Used to straighten anchors installed out of plumb.


**Part No.** SHTOL-60--ST



### POST REMOVAL TOOL

Post maintenance slotted T-Bar tool aides in the removal of posts from anchors.

**Part No.** SHTOL-61--MT



SH-51 Cutting Tool

### MAINTENANCE KIT

Includes cutting tool, replacement blade, adjustable hacksaw and channel pliers. These tools are used to remove broken or damaged posts from anchors.


**Part No.** SHTOL-50--MT



## POWER INSTALLATION TOOLS

If using a jackhammer, order a jackhammer shank *and* an SH6 tool.

If using a piston cylinder hammer, order an adapter drive cap *and* an SH6 tool.

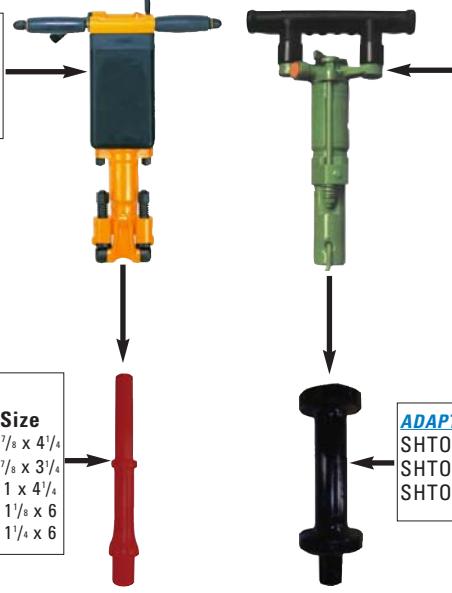

SHANKS		
Part #	Tool	Size
SHTOL-07--HT	Pionjar	7/8 x 4 1/4
SHTOL-53--HT	Stanley	7/8 x 3 1/4
SHTOL-54--HT	Thor	1 x 4 1/4
SHTOL-55--HT	Bosch	1 1/8 x 6
SHTOL-56--HT	Ingersol	1 1/4 x 6

ADAPTER DRIVE CAP		
SHTOL-57--HT	Stanley	PD-45
SHTOL-58--HT	Fairmont	H4825C
SHTOL-59--HT	Rhino	PD-50

**PILOT HOLE TOOL**  
 Self-cleaning pilot hole tool for use with power equipment to provide pilot holes for Safe-Hit soil anchors in compacted or adverse soils. Requires drive shank or ADAPTER for specific power tool used.  
**Part No.** SHTOL-08--HT

**SH6 DRIVE TOOL**  
 Interface from shanks and/or adaptors to soil anchor (always needed)  
**Part # SHTOL-06--HT**

**SOIL ANCHOR**  
 (ordered seperately)

More available. Call for details.